


HTP066

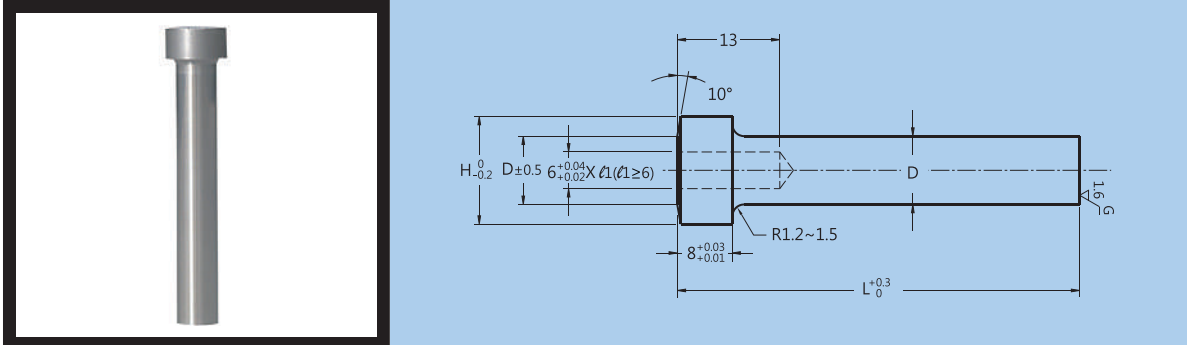


Type 品名	Material 材質	Hardness 硬度	Delivery 交貨日
HTP066-A	SKH51	61~64HRC	8 Working Days 8 個工作日
HTP066-B	Powdered Highspeed Steel 粉末高速鋼	64~67HRC	

D Tolerance 柄部直徑公差
m5

Type 品名	D	L (u:10mm)	H
HTP066-A HTP066-B	10	50~100	15
	13	50~100	18
	16	50~100	21
	20	50~100	25
	25	50~100	30

Order Ex. 訂購範例



沖頭材質
外徑
長度

Alterations 追加加工名稱	Description 加工說明	Order Ex. 訂購範例
LC	Length change 長度變更 $20 \leq LC < L$ *0.1mm increments 指定單位0.1mm	HTP066-A-10-50-LC
LKC LKZ	Full length tolerance change 變更全長公差 LKC → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.05 \\ 0 \end{matrix}$ LKZ → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.01 \\ 0 \end{matrix}$	HTP066-A-10-50-LKC
KC	Addition of single key flat to head 頭緣部止迴1面加工	HTP066-A-10-50-KC
WKC	Addition of double key flats in parallel 頭緣平行加工(2面)	HTP066-A-10-50-WKC
AC	The jector pin is removed to create an air path and the side vent hole is plugged from the inside by inserting a resin (ABS) ring. 作為空壓用，將頂出銷拔除，放入環狀樹脂(ABS)從內側將橫孔塞住	HTP066-A-10-50-AC
NC	The jector pin is removed. 拔除頂出銷 * Cannot be combined with AC 不可與AC併用	HTP066-A-10-50-NC