


Pushing Pins

頂出銷

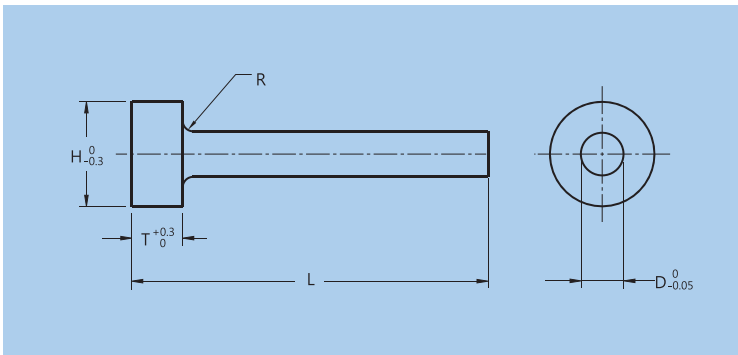

Type 品名	Material 材質	Hardness 硬度	Delivery 交貨日	L	R
HTP070-A	DH2F	40HRC~	8 Working Days 8 個工作日	$L^{+0.3}_0$	$R \leq 0.3$
HTP070-B				$L \pm 0.1$	$0.5 \leq R \leq 1.0$
HTP070-C	SKD61	50HRC~			


Type 品名	D	L (μ 0.1mm)	T	H
HTP070-A	1	5.0~70.0	2	3
	1.5	5.0~70.0	2	3
	2	5.0~70.0	2	4
	2.5	5.0~70.0	2	5
	3	5.0~70.0	2	6
	4	5.0~70.0	3	8
	5	5.0~70.0	3	9

Type 品名	D	L (μ 0.1mm)	T	H
HTP070-B	2	10.0~100.0	5	5
	3	10.0~100.0	5	8
	4	10.0~100.0	5	10
	5	10.0~100.0	5	12
	6	10.0~100.0	5	14
	8	10.0~100.0	5	16
	10	10.0~100.0	5	18

Type 品名	D	L (μ 0.1mm)	T	H
HTP070-C	2	10.0~100.0	5	5
	3	10.0~100.0	5	8
	4	10.0~100.0	5	10
	5	10.0~100.0	5	12
	6	10.0~100.0	5	14
	8	10.0~100.0	5	16
	10	10.0~100.0	5	18

Order Ex. 訂購範例

HTP070-□-1-L



材質
外徑
長度

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
RC	R0.2~0.3	Rounding of pin end to R0.2~0.3	銷頭部做 R0.2 ~ 0.3	HTP070-A-1-10-RC
HC	±	Head diameter change	變更頭緣直徑 $D \leq HC \leq H$ 0.1mm increments 指定單位0.1mm	HTP070-A-1-10-HC