



HTP063

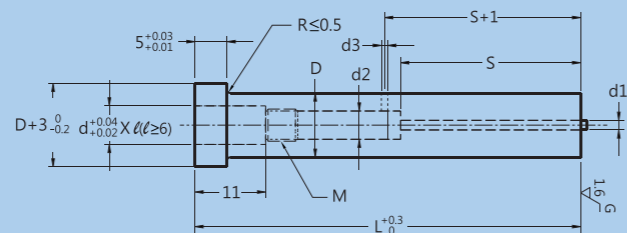

※ Including Dowel Pin 附定位銷


Type 品名	Material 材質		Harcness 硬度		Delivery 交貨日
HTP063	Punch 沖頭	Dowel pin 定位銷	Punch 沖頭	Dowel pin 定位銷	8 Working Days 8 個工作日
	Equivalent to SKD11 SKD11同級	SUJ2	60~63HRC	58~HRC	



Type 品名	D	L (u:10mm)	d	d1	d2	d3	S	M	Jector pin diameter 頂出銷直徑
HTP063	10	60~120	6	1.5	4.4	1.5	28	5	1.4
	13	60~120	6	1.8	4.4	1.5	28	5	1.7
	16	(60)~120	6	2.8	4.4	1.5	36	5	2.7
	20	(60)~120	6	2.8	4.4	1.5	36	5	2.7
	25	(60)~120	6	2.8	4.4	1.5	36	5	2.7
	32	(60)~120	6	2.8	4.4	1.5	36	5	2.7
	38	(60)~120	10	4.2	6.9	1.5	37	8	4.0
45	(60)~120	10	4.2	6.9	1.5	37	8	4.0	

* L (60) → øD16 ~ 45 = S24
* L (60) → øD16 ~ 45 = S24

Order Ex. 訂購範例



外徑
長度

Alterations 追加加工名稱	Description 加工說明	Order Ex. 訂購範例
LC	Length change 長度變更 $40 \leq LC < L$ * 0.1mm increments 指定單位0.1mm * S dimension is shortened accordingly S尺寸會變短	HTP063-10-50-LC
LKC LKZ	Full length tolerance change 變更全長公差 LKC → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.05 \\ 0 \end{matrix}$ LKZ → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.01 \\ 0 \end{matrix}$ * Cannot be used for D > 25 不適用於D > 25	HTP063-10-50-LKC
KC	Addition of single key flat to head 頭緣部止迴1面加工	HTP063-10-50-KC
WKC	Addition of double key flats in parallel 頭緣平行加工(2面)	HTP063-10-50-WKC
HC	Head diameter change 變更頭緣直徑 $D \leq HC < H$ * 0.1 mm increments 指定單位0.1mm	HTP063-10-50-HC
TC	$3.5 \leq TC < 5$ * 0.1 mm increments 指定單位0.1mm (If combined with TKC · TKM, 0.01mm increments can be selected. 與TKC · TKM併用時可指定至0.01mm單位) * Full length L is shortened by (5 - TC) . If combined with LC, full length is equal to LC 全長L會減少(5-TC) · 與LC併用時 · 全長與LC相同	HTP063-10-50-TC
TKC TKM	Head thickness tolerance change 變更頭緣厚度公差 TKC → T $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.02 \\ 0 \end{matrix}$ TKM → T $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} 0 \\ -0.02 \end{matrix}$	HTP063-10-50-TKC
AC	The jector pin is removed to create an air path and the side vent hole is plugged from the inside by inserting a resin (ABS) ring. 作為空壓用 · 將頂出銷拔除 · 放入環狀樹脂(ABS)從內側將橫孔塞住	HTP063-10-50-AC
NC	The jector pin is removed. 拔除頂出銷 * Cannot be combined with AC 不可與AC併用	HTP063-10-50-NC