


HFA002

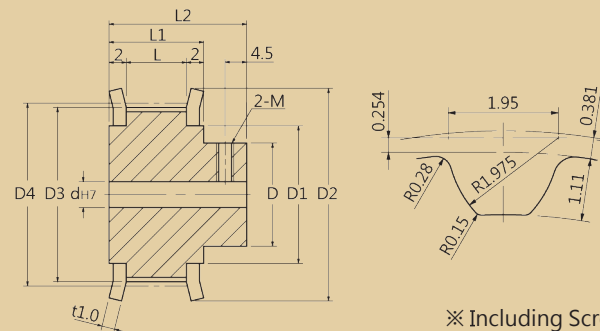

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA002-A	Aluminium 鋁合金	Anodizing 白色陽極	5 Working Days 5 個工作日
HFA002-B		Black Anodizing 黑色陽極	
HFA002-C		Hard Anodizing 硬質陽極	
HFA002-D		Nickel Electroless 無電解鍍	
HFA002-E	S45C 中碳鋼	-	
HFA002-F		Blackening 染黑	
HFA002-G		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
4~5	3
6~17	4
18~33	5
34~42	6
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 軸頸孔-軸轂側沉頭孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV&V) (u:1mm)	d1(IV&V) (u:1mm)	L3(IV&V) (u:1mm)	Belt Width 皮帶寬度 (L/L1/L2)	D	D1	D2	D3	D4
HFA002-A HFA002-B HFA002-C HFA002-D HFA002-E HFA002-F HFA002-G	24	4~10	4~8	-	4~6	6~8	2≤L3≤L2-2	6mm 7/11/19	14	16	25	22.16	22.92
	25	4~11	4~10	8	4~8	6~10			16	18	28	23.11	23.87
	26	5~11	5~10	8	5~8	7~10			16	18	28	24.07	24.83
	28	5~13	5~10	8	5~10	7~12			18	20	30	25.98	26.74
	30	6~15	6~12	8~11	6~13	8~15			20	23	32	27.89	28.65
	32	6~16	6~12	8~11	6~14	8~16			20	25	35	29.80	30.56
	34	6~20	6~18	8~13	6~18	8~23		10mm 11/15/23	26	28	40	31.71	32.47
	36	6~20	6~18	8~13	6~18	8~23			26	28	40	33.62	34.38
	40	8~24	8~21	8~16	8~22	10~24			30	32	44	37.44	38.20
	44	8~28	8~23	8~18	8~26	10~28			32	36	48	41.25	42.02
	48	8~30	8~25	8~20	8~28	10~30		15mm 17/21/29	34	38	50	45.07	45.84
	50	8~30	8~25	8~20	8~28	10~30			34	40	52	46.98	47.75
	60	8~35	8~30	8~22	8~33	10~35			39	46	61	56.53	57.30
	72	8~46	8~38	8~32	8~44	10~46			50	58	74	67.99	68.75

Order Ex. 訂購範例

HFA002-□-24-□-d-(d1)-□-(L3)-S3M-B



A B C D E F or G
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV&V Type)
Width of Timing Pulley(6/10/15mm)
Length of Hole(IV&V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV&V型)
皮帶輪寬度(6/10/15mm)
軸孔長度(適用於IV&V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA002-A-24-I-4-6-S3M-B-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA002-A-24-I-4-6-S3M-B-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA002-A-24-I-4-6-S3M-B-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA002-A-24-I-4-6-S3M-B-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA002-A-24-I-4-6-S3M-B-S Flange Cut 法蘭切割
T		Tapped Hole Dimensions 牙孔尺寸變更		HFA002-A-24-I-4-6-S3M-B-T Tapped Hole Dimensions Change 牙孔尺寸變更