


HFA035

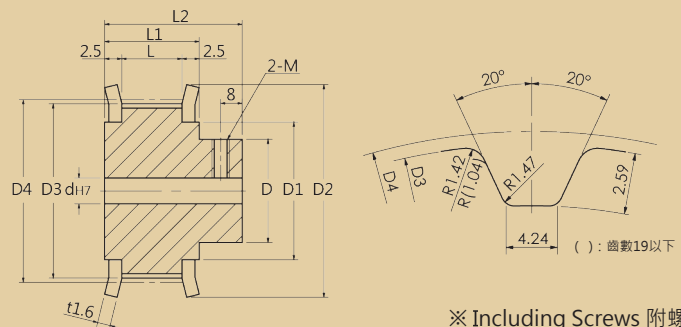

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA035-A	Aluminium 鋁合金	Anodizing 白色陽極	8 Working Days 8 個工作日
HFA035-B		Black Anodizing 黑色陽極	
HFA035-C		Hard Anodizing 硬質陽極	
HFA035-D		Nickel Electroless 無電解鍍	
HFA035-E	S45C 中碳鋼	-	
HFA035-F		Blackening 染黑	
HFA035-G		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
12	4
13~17	5
18~30	6
31~46	8
47~65	10
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 軸頸孔-軸轂側沉頭孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV&V) (u:1mm)	d1(IV&V) (u:1mm)	L3(IV&V) (u:1mm)	Belt Width 皮帶寬度 (L/L1/L2)	D	D1	D2	D3	D4
HFA035-A HFA035-B HFA035-C HFA035-D HFA035-E HFA035-F HFA035-G	14	12~35	12~29	12~25	12~33	14~35	3≤L3≤L2-3	19.1mm (3/4inch) 21/26/41	39	45	61	55.22	56.60
	15	12~41	12~33	12~29	12~39	14~41			45	50	67	59.27	60.64
	16	12~44	12~36	12~30	12~42	14~44			48	56	70	63.31	64.68
	17	12~44	12~36	12~30	12~42	14~44			48	60	80	67.35	68.72
	18	12~46	12~38	12~35	12~44	14~46		25.4mm (1inch) 27/32/47	50	60	80	71.39	72.77
	19	14~46	12~38	14~35	14~44	16~46			50	67	87	75.44	76.81
	20	14~54	14~46	14~38	14~52	16~54			58	67	87	79.48	80.85
	21	14~54	14~46	14~38	14~52	16~54			58	75	95	83.52	84.89
	22	14~54	14~46	14~38	14~52	16~54		38.1mm (1.5inch) 40/45/60	58	75	95	87.56	88.94
	24	16~54	16~46	16~38	16~52	18~54			58	84	104	95.65	97.01
	25	16~59	16~49	16~41	16~57	18~59			63	90	111	99.69	101.06
	26	20~59	20~49	20~41	20~57	22~59			63	90	111	103.73	105.11
	28	20~59	20~49	20~41	20~57	22~59		50.8mm (2inch) 54/59/74	63	102	123	111.82	113.19
	30	20~59	20~49	20~41	20~57	22~59			63	105	127	119.90	121.28
	32	20~59	20~49	20~43	20~57	22~59			63	115	135	127.99	129.36
	34	20~67	20~57	20~49	20~65	22~67			71	125	144	136.07	137.45
	36	20~67	20~57	20~49	20~65	22~67			71	130	152	144.16	145.53

Order Ex. 訂購範例

HFA035-□-14-□-d-(d1)-□-(L3)-H-B



A B C D E F or G
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV&V Type)
Width of Timing Pulley(19.1/25.4/38.1/50.8mm)
Length of Hole(IV&V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV&V型)
皮帶輪寬度(19.1/25.4/38.1/50.8mm)
軸孔長度(適用於IV&V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA035-A-14-I-12-19.1-H-B-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA035-A-14-I-12-19.1-H-B-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA035-A-14-I-12-19.1-H-B-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA035-A-14-I-12-19.1-H-B-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA035-A-14-I-12-19.1-H-B-S Flange Cut 法蘭切割
T		Tapped Hole Dimensions 牙孔尺寸變更		HFA035-A-14-I-12-19.1-H-B-T Tapped Hole Dimensions Change 牙孔尺寸變更