


HFP038

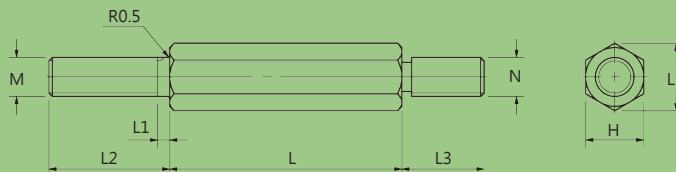


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP038-A	1015 低碳鋼	-	5 Working Days 5 個工作日
HFP038-B		Blackening 染黑	
HFP038-C		Nickel Electroless 鍍無電解鎳	
HFP038-D	SUS304 不鏽鋼	-	

L(mm)	TOL.公差 (mm)
<300	±0.2
<600	±0.3
<800	±0.4

Type	H	L(u:0.5mm)	L2(u:0.5mm)	L3(u:0.5mm)	M&N	L1	L5
HFP038-A	5	8~50	5~20	5~20	2/2.6	1.0	5.8
	6	15~50	5~30	5~30	3/4	1.5	6.9
	7	20~150	5~30	5~30	3/4	1.5	8.1
	8	20~250	8~40	8~40	4/5	1.6	9.2
HFP038-B	10	25~350	8~42	8~42	4/5/6	2.0	11.5
	12	25~400	10~55	10~55	5/6/8	2.5	13.9
HFP038-C	13	30~400	10~55	10~55	5/6/8	2.5	15
	14	35~500	12~60	12~60	6/8/10	3.0	16.2
HFP038-D	17	35~500	12~60	12~60	6/8/10	3.0	19.6
	19	45~500	15~75	15~75	8/10/12	3.5	21.9
	24	55~600	20~80	20~80	10/12/16	4.0	27.7
	27	65~600	25~90	25~90	12/16/20	5.0	31.2
	30	80~600	30~100	30~100	16/20/24	6.0	34.6
	32	80~600	30~100	30~100	16/20/24	6.0	36.9

Order Ex. 訂購範例

HFP038-□-5-L-L2-L3-M-N



A B C or D
Opposite Length of Hexagonal Post
Length of Hexagonal Post
Length of Thread
Length of Thread
Choose M (Thread)
Choose N (Thread)

選擇六角柱材質
六角柱對邊長度
六角柱長度
螺紋長度
螺紋長度
選擇螺紋M
選擇螺紋N

Alterations	追加工名稱	Description	加工說明	Order Ex. 訂購範例
A		Length tolerance change 長度公差變更		HFP038-A-5-30-10-8-M2-N2-A(±0.03) Length tolerance change to ±0.03 長度公差變更為±0.03