



SZ-CPRPR

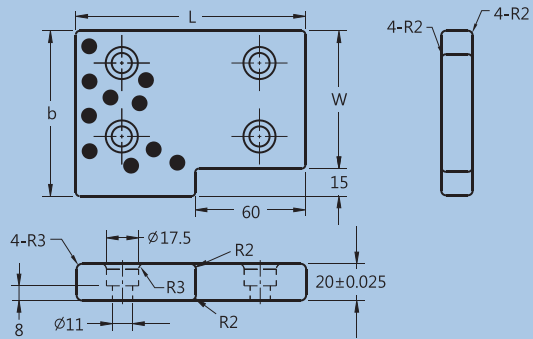

SZ-CPRPL

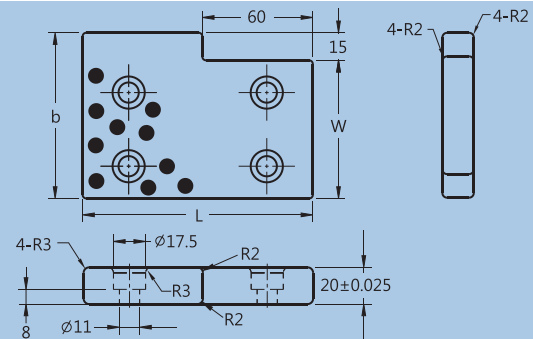

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
SZ-CPRPR-A SZ-CPRPL-A	S45C	Surface Hardened 高頻淬火	57~62 HRC	10 Working Days 10 個工作日
SZ-CPRPR-B SZ-CPRPL-B	Brass+Graphite 高力黃銅+石墨	-	-	

Type	W	L	a	b	c	ℓ
SZ-CPRPR-A SZ-CPRPL-A	75	100	105	90	40	50
		125				75
		150				100
SZ-CPRPR-B SZ-CPRPL-B	100	125	130	115	50	75
		150				100
		150				100
SZ-CPRPR-B SZ-CPRPL-B	125	150	155	140	75	100
		200				150
		250				200
	150	200	180	165	100	150
250		200				

Order Ex. 訂購範例

SZ-CPRPR-A-W-L