


HWLB-003

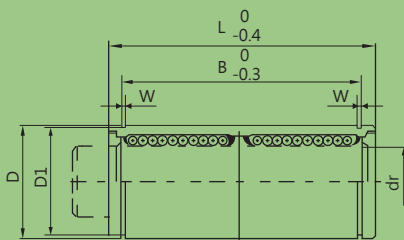

※ Including Seal 附油封

Type 項次	Outer Cylinder 外筒	Balls 滾珠	Retainer 保持器	Hardness 硬度	Delivery 交貨日
HWLB-003	SUJ2	SUJ2	Plastic(Duracon M90 Equivalent) 樹脂(相當於工程塑膠M90)	58HRC~	10 Working Days 10 個工作日

Type	d	TOL.	D	TOL.	L	B	W	D1	Eccentricity (Max) 偏心(最大)	Rows of Balls 滾珠列數	Basic Ratingload C(動態)N (Dynsmic)	基本額定負荷 Co(靜態)N (Static)
HWLB-003	3	0 -0.010	7	0 -0.011	19	-	-	-	0.010	4	138	210
	4	0 -0.010	8	0 -0.011	23	-	-	-	0.010	4	176	254
	5	0 -0.010	10	0 -0.011	28	18.2	1.1	9.6	0.010	4	203	412
	6	0 -0.010	12	0 -0.013	35	27	1.1	11.5	0.015	4	323	530
	8	0 -0.010	15	0 -0.013	45	35	1.1	14.3	0.015	4	431	784
	10	0 -0.010	19	0 -0.013	55	44	1.3	18	0.015	4	588	1100
	12	0 -0.010	21	0 -0.016	57	46	1.3	20	0.015	4	657	1200
	13	0 -0.010	23	0 -0.016	61	46	1.3	22	0.015	4	816	1570
	16	0 -0.010	28	0 -0.016	70	53	1.6	27	0.015	5	1230	2350
	20	0 -0.012	32	0 -0.019	80	61	1.6	30.5	0.020	5	1400	2750
	25	0 -0.012	40	0 -0.019	112	82	1.85	38	0.020	6	1560	3140
	30	0 -0.012	45	0 -0.019	123	89	1.85	43	0.020	6	2490	5490
	35	0 -0.015	52	0 -0.022	135	99	2.1	49	0.025	6	2650	6270
	40	0 -0.015	60	0 -0.022	154	121	2.1	57	0.025	6	3430	8040
	50	0 -0.015	80	0 -0.022	192	148	2.6	76.5	0.025	6	6080	15900
	60	0 -0.020	90	0 -0.025	211	170	3.15	86.5	0.025	6	7650	20000

Order Ex. 訂購範例

HWLB-003-d

Internal Diameter

內徑